



The **M-4** is a 90 volt DC motor controller that runs on 110v AC and is designed to manually control up to 4 curtain motors. This unit plugs directly into a standard 110v outlet.

1.0 M-4 Features

The **M-4** can control up to four (4) motors in both forward and reverse, utilizing a bi-directional switch and four (4) momentary push buttons. It features two (2) resettable circuit breakers. (see Fig.1)

2.0 M-4 Wiring and Set-up

Connect the 2 lead motor wires to the Motor Lead Terminals as indicated on the diagram inside the cover. **NOTE: 4 lead wire will not be used.** (see Fig. 2)

Note: The initial direction of the motor can be reversed by switching the polarity of the lead wires. (+ and – terminals)

3.0 Operating the M-4

Rotate the direction selector to either the “UP” or “DOWN” position. Press the momentary button which corresponds with the motor you wish to operate. Release the button to stop the motor. When done, switch the direction selector to “OFF”.

NOTE: There are no automatic stops. Motors will continue to operate as long as the button is depressed.

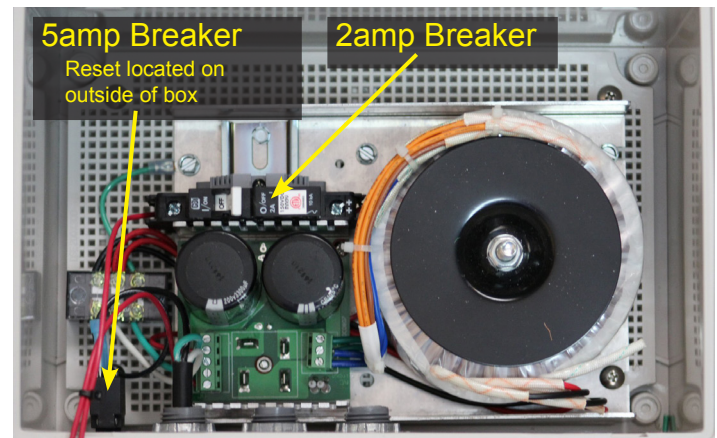


Fig.1

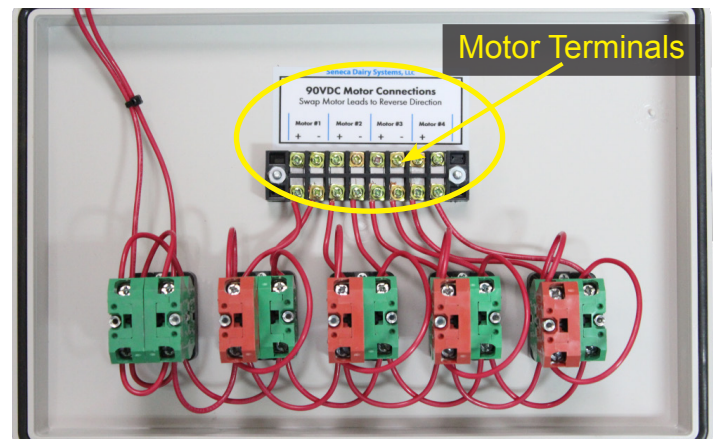


Fig.2